



TV1200

Tandem Asphalt Rollers

OPERATING WEIGHT	6,382 lbs (2,895 kg)
NET ENGINE POWER	30 hp (22.5 kW)
STATIC LINEAR LOAD	67.5 lbs/in (13.9 kg/cm)
CENTRIFUGAL FORCE	6,776 lbs (30.4 kN)



TANDEM ASPHALT ROLLERS

Operating Data, Standard Equipment	
	TV1200
Operating weight	6,382 lbs (2,895 kg)
Basic weight	5,977 lbs (2,711 kg)
Static linear load	67.5 lbs/in (13.9 kg/cm)
Total length	93.5 in (2,375 mm)
Total width	50 in (1,270 mm)
Turning radius (inside)	99 in (2,525 mm)
Total height	104.33 in (2,650 mm)
Frame articulation degrees	30°
Frame oscillation degrees	15°
Frequency (Hz) VPM	3,120 (51 Hz)
Amplitude	.022 in (0.6 mm)
Centrifugal Force	6,776 lbs (30.4 kN)
Gradeability % (with vibration on)	30%
Gradeability % (with vibration off)	40%
Drum thickness	51 in (13 mm)

Tandem Asphalt Rollers

TV1200


Specifications

Engine	
Manufacturer, model	Deutz, F2L 1011F
Type	2-cylinder, diesel engine
Power rating at 2,500 rpm	30 hp (22.5 kW)
Cooling system	Air
Electrical System	
Nominal voltage	12 Volt
Battery	770 CCA
Alternator	65 Amp
Hydrostatic Transmission	
Hydrostatic drive. Forward and reverse selected from joystick. Infinitely variable speed control forward and reverse. 0 – 7.2 mph (0 – 11.6 km/h)	
Drive	
Dual radial piston drive motors.	
Brakes	
Service brake: Hydrostatic drive provides dynamic braking.	
Parking brake: Spring applied failsafe	
Steering	
Heavy-duty articulated steering	
Fluid Capacities	
Fuel tank	11.6 gal (44 L)
Hydraulic system (includes tank)	11.6 gal (44 L)
Water tank	47.5 gal (180 L)
Operator's Area	
Open operator's seat with functional design, excellent all-round visibility and user-friendly operator controls.	
Operator's suspension seat with hydraulic cushioning and lap belt; weight, height and longitudinally adjustable.	

Standard Features

Vandal protection package
Back-up alarm
2 scraper bars per drum
Hydraulic test points
Electrical diagnostics system (LED lights)
Tow valve
12 volt battery disconnect
Pressure and gravity water
ROPS

Dimensions

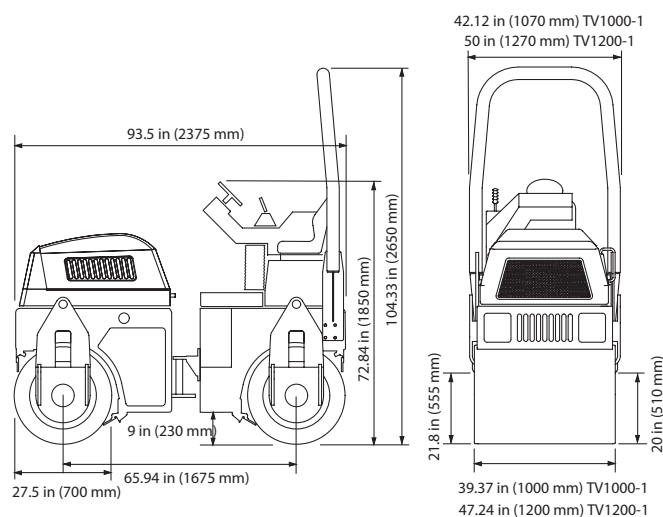

TEREX Construction Americas

8800 Rostin Road
Southaven, MS 38671
USA

TEL 662-393-1800
SALES 866-837-3923
PARTS & TECH SUPPORT 888-201-6008
FAX 662-393-1700
EMAIL sales@terexca.com
WEB terexca.com

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local TEREX Distributor